

Introduzione ai Sistemi Operativi



Alessio Vecchio

alessio.vecchio@unipi.it


Dip.di Ingegneria dell'Informazione
Università di Pisa

Based on original slides by Silberschatz, Galvin, and Gagne
Operating System Concepts

What is an Operating System?

- A program that acts as an intermediary between a user of a computer and the computer hardware
- Operating system goals:
 - Execute user programs and make solving user problems easier
 - Make the computer system convenient to use
 - Use the computer hardware in an efficient manner

Abstract View

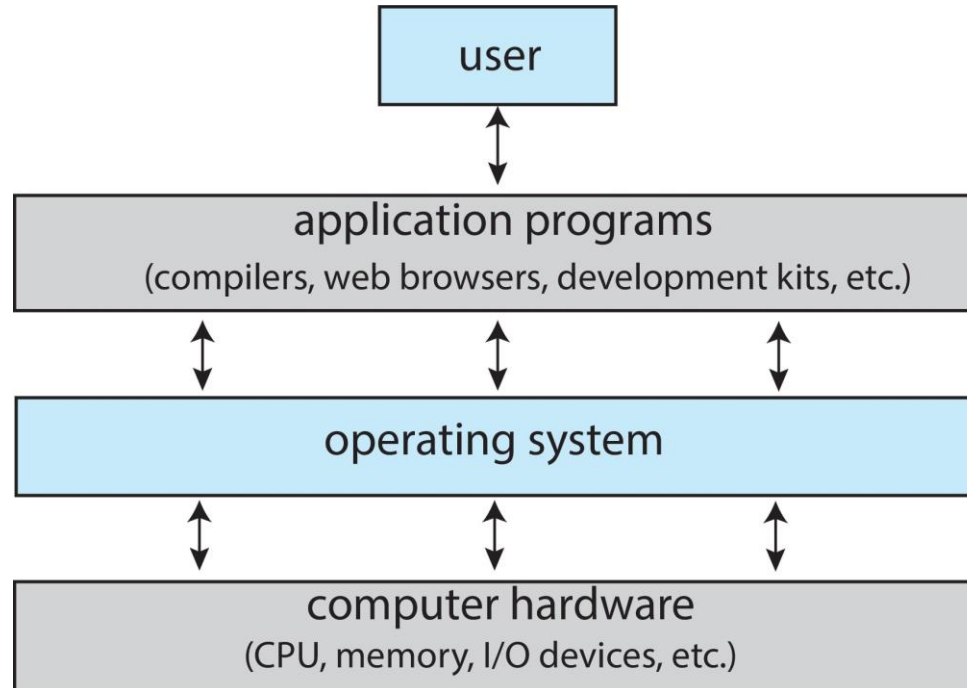

What Operating Systems Do

- Depends on the point of view
- Users want convenience, **ease of use** and **good performance**
 - Don't care about **resource utilization**
- But shared computer such as **mainframe** or **minicomputer** must keep all users happy
 - Operating system is a **resource allocator** and **control program** making efficient use of HW and managing execution of user programs
- Users of dedicate systems such as **workstations** have dedicated resources but frequently use shared resources from **servers**
- Mobile devices like smartphones and tables are resource poor, optimized for usability and battery life
 - Mobile user interfaces such as touch screens, voice recognition
- Some computers have little or no user interface, such as embedded computers in devices and automobiles
 - Run primarily without user intervention

Operating System Definition


- OS is a **resource allocator**
 - Manages all resources
 - Decides between conflicting requests for efficient and fair resource use
- OS is a **control program**
 - Controls execution of programs to prevent errors and improper use of the computer

Operating System Definition

- No universally accepted definition
- “Everything a vendor ships when you order an operating system” is a good approximation
 - But varies wildly
- “The one program running at all times on the computer” is the **kernel**, part of the operating system
- Everything else is either
 - A **system program** (ships with the operating system, but not part of the kernel) , or
 - An **application program**, all programs not associated with the operating system
- Today’s OSES for general purpose and mobile computing also include **middleware** – a set of software frameworks that provide addition services to application developers such as databases, multimedia, graphics

Computer System Organization

- Computer-system operation
 - One or more CPUs, device controllers connect through common **bus** providing access to shared memory
 - Concurrent execution of CPUs and devices competing for memory cycles

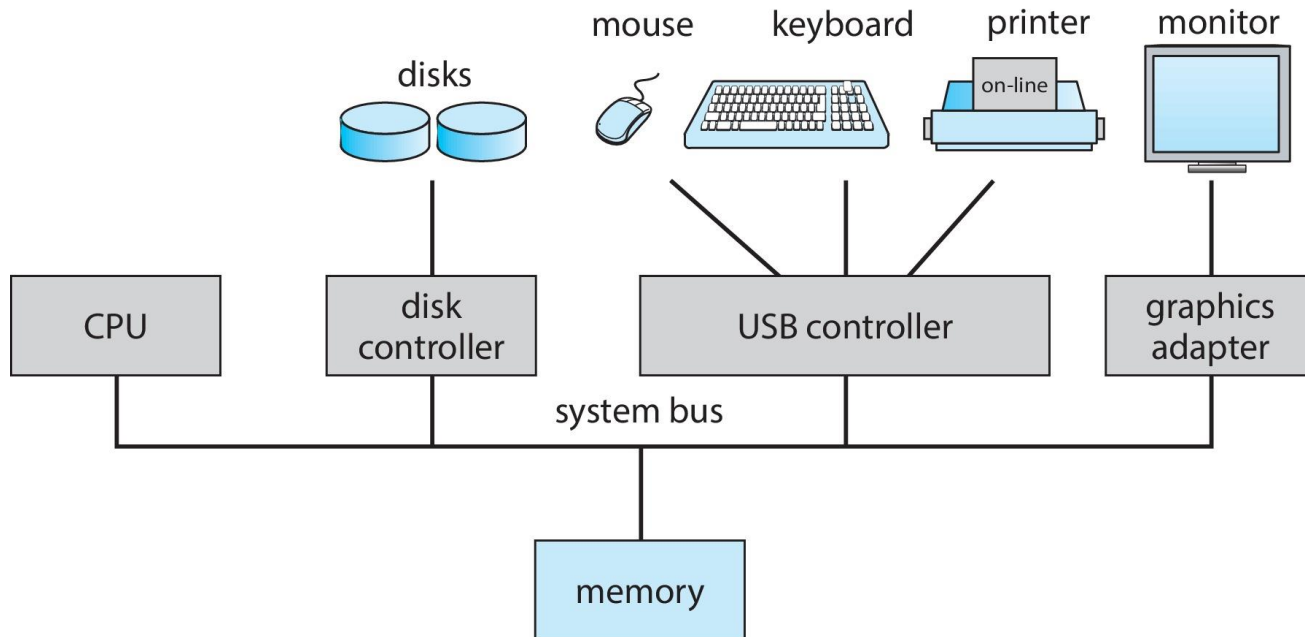


Computer-System Operation

- I/O devices and the CPU can execute concurrently
- Each device controller is in charge of a particular device type
- Each device controller has a local buffer
- Each device controller type has an operating system **device driver** to manage it
- CPU moves data from/to main memory to/from local buffers
- I/O is from the device to local buffer of controller
- Device controller informs CPU that it has finished its operation by causing an **interrupt**

Common Functions of Interrupts

- Interrupt transfers control to the interrupt service routine generally, through the **interrupt vector**, which contains the addresses of all the service routines
- Interrupt architecture must save the address of the interrupted instruction
- A **trap** or **exception** is a software-generated interrupt caused either by an error or a user request
- An operating system is **interrupt driven**


Interrupt Timeline

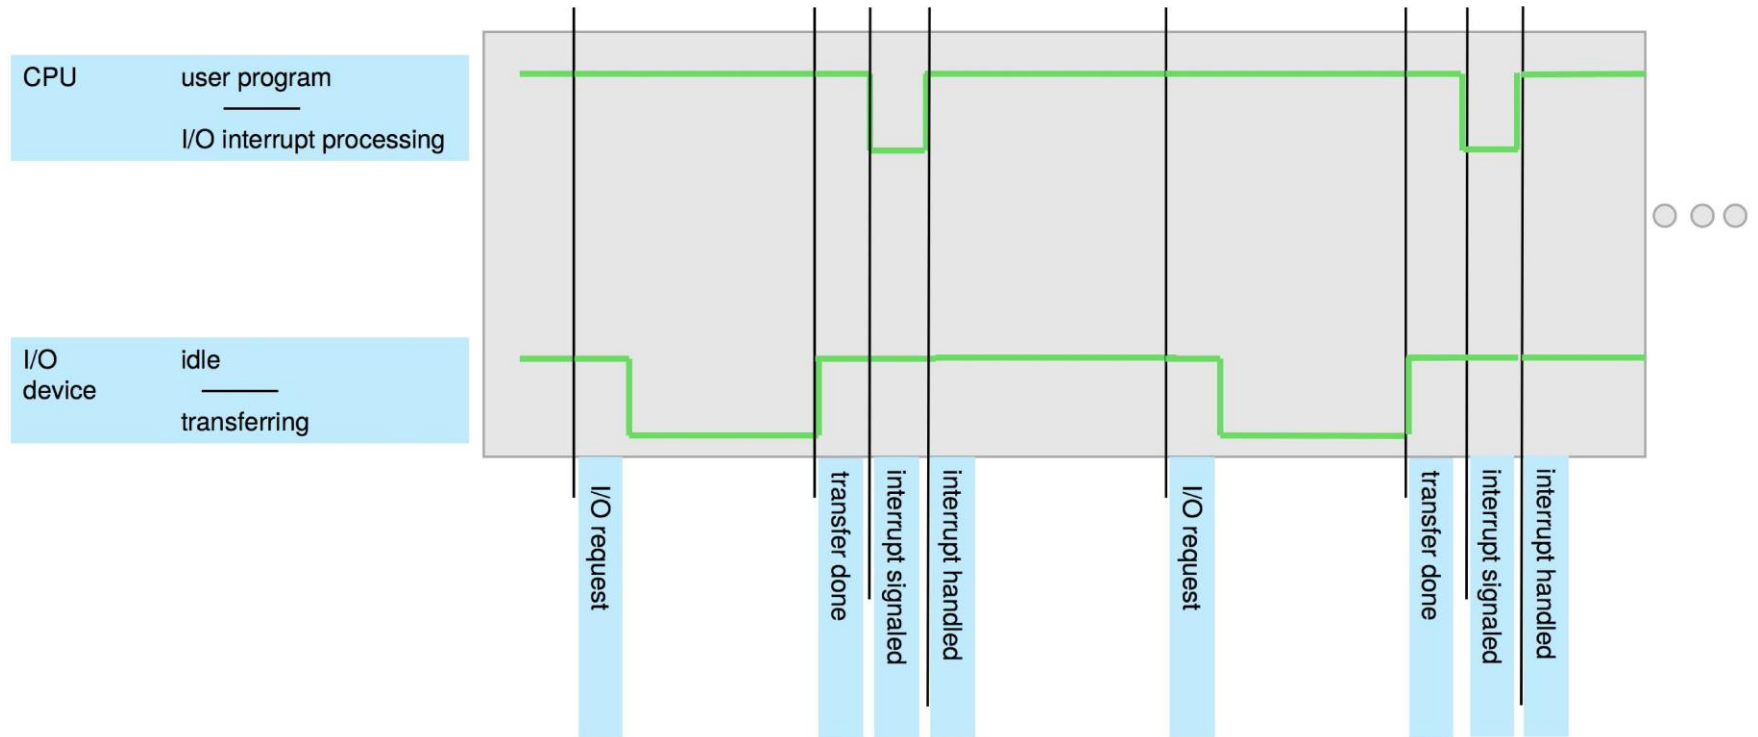


Interrupt Handling

- The operating system preserves the state of the CPU by storing the registers and the program counter
- Determines which type of interrupt has occurred
- Separate segments of code determine what action should be taken for each type of interrupt

Interrupt-driven I/O Cycle

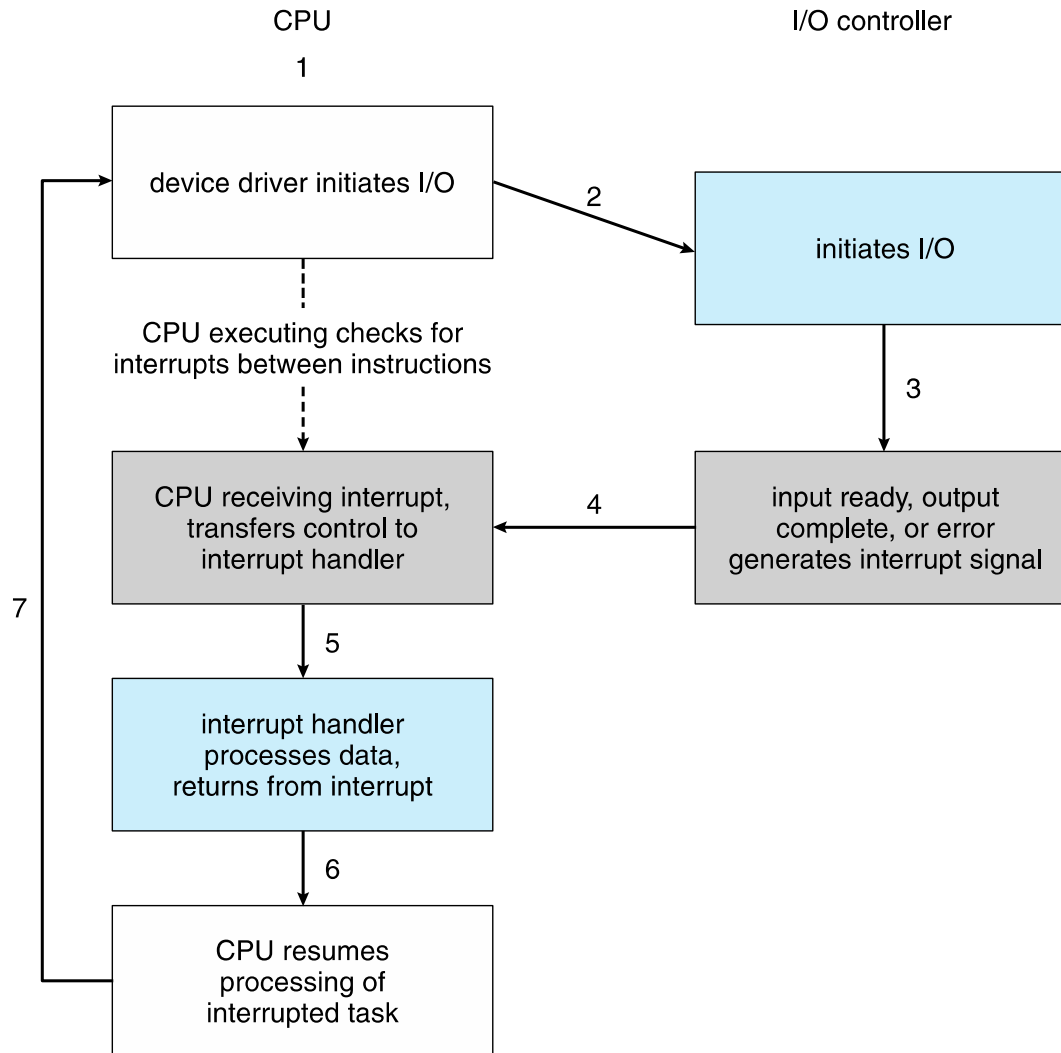

How a Modern Computer Works

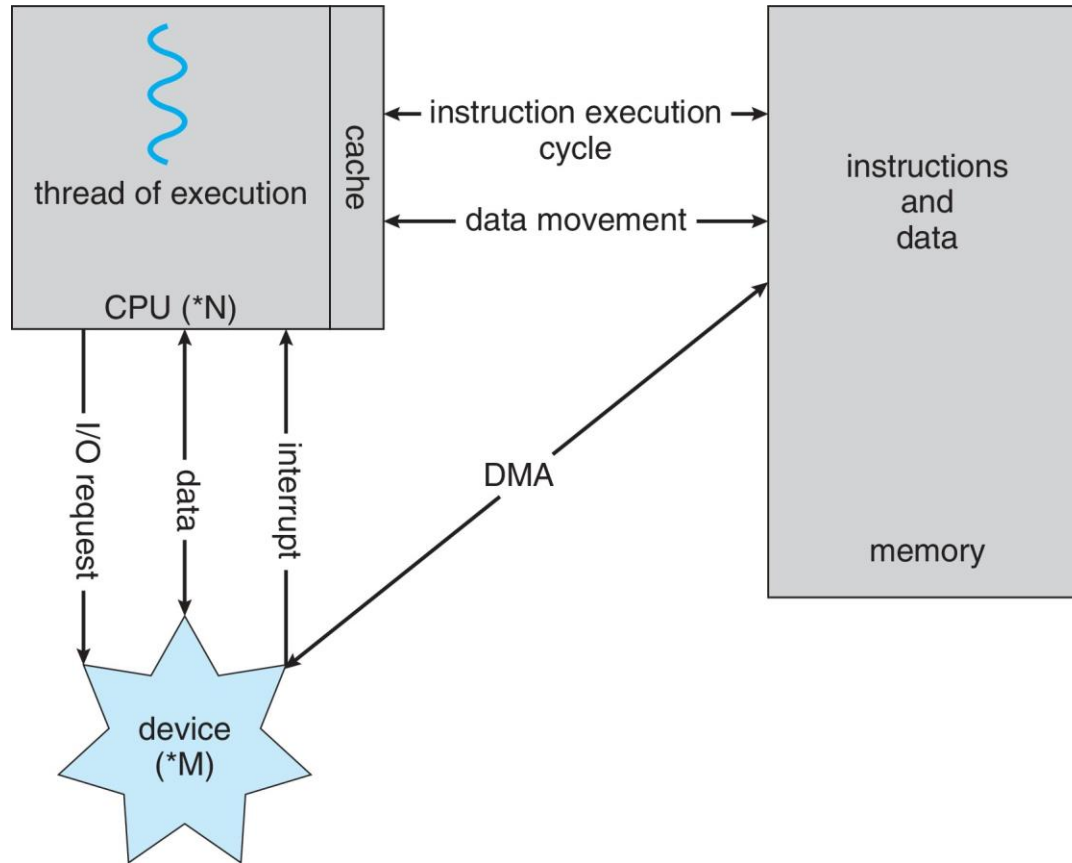

A von Neumann architecture

Direct Memory Access Structure

- Used for high-speed I/O devices able to transmit information at close to memory speeds
- Device controller transfers blocks of data from buffer storage directly to main memory without CPU intervention
- Only one interrupt is generated per block, rather than the one interrupt per byte


Operating-System Operations

- Bootstrap program – simple code to initialize the system, load the kernel
- Kernel loads
- Starts **system daemons** (services provided outside of the kernel)
- Kernel **interrupt driven** (hardware and software)
 - Hardware interrupt by one of the devices
 - Software interrupt (**exception** or **trap**):
 - ▶ Software error (e.g., division by zero)
 - ▶ Request for operating system service – **system call**

Computer-System Architecture


- Most systems use a single general-purpose processor
 - Most systems have special-purpose processors as well
- **Multiprocessors** systems growing in use and importance
 - Also known as **parallel systems**, **tightly-coupled systems**
 - Advantages include:
 1. **Increased throughput**
 2. **Economy of scale**
 3. **Increased reliability** – graceful degradation or fault tolerance
 - Two types:
 1. **Asymmetric Multiprocessing** – each processor is assigned a specific task.
 2. **Symmetric Multiprocessing** – each processor performs all tasks

Symmetric Multiprocessing Architecture

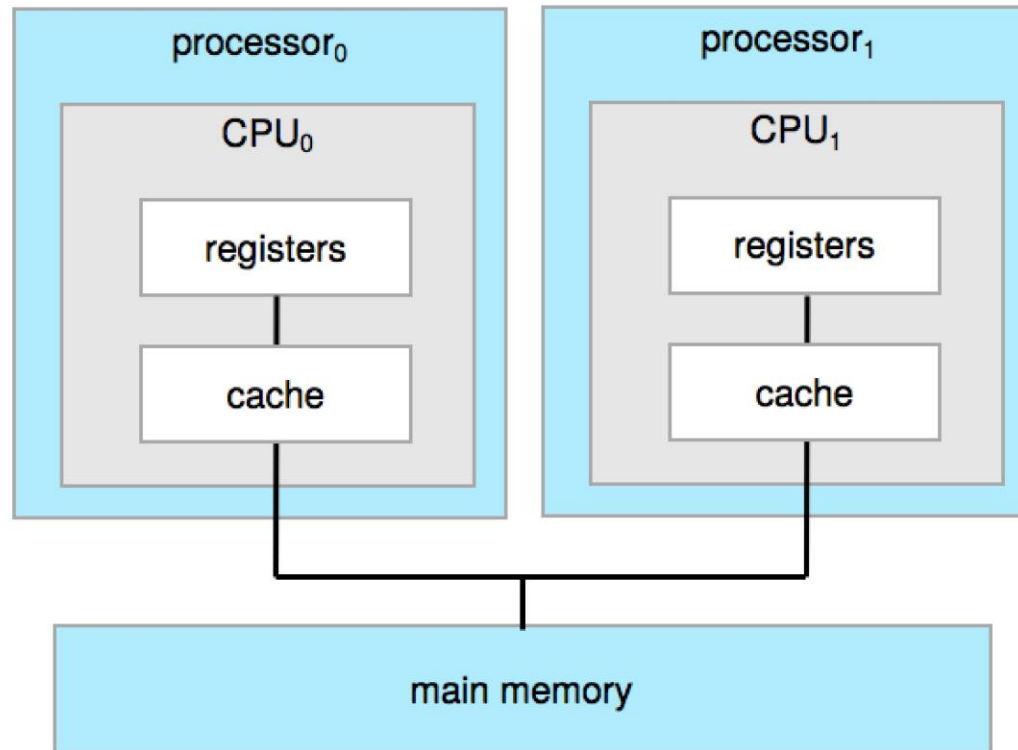

Dual-Core Design


- Multi-chip and **multicore**
- Systems containing all chips
 - Chassis containing multiple separate systems

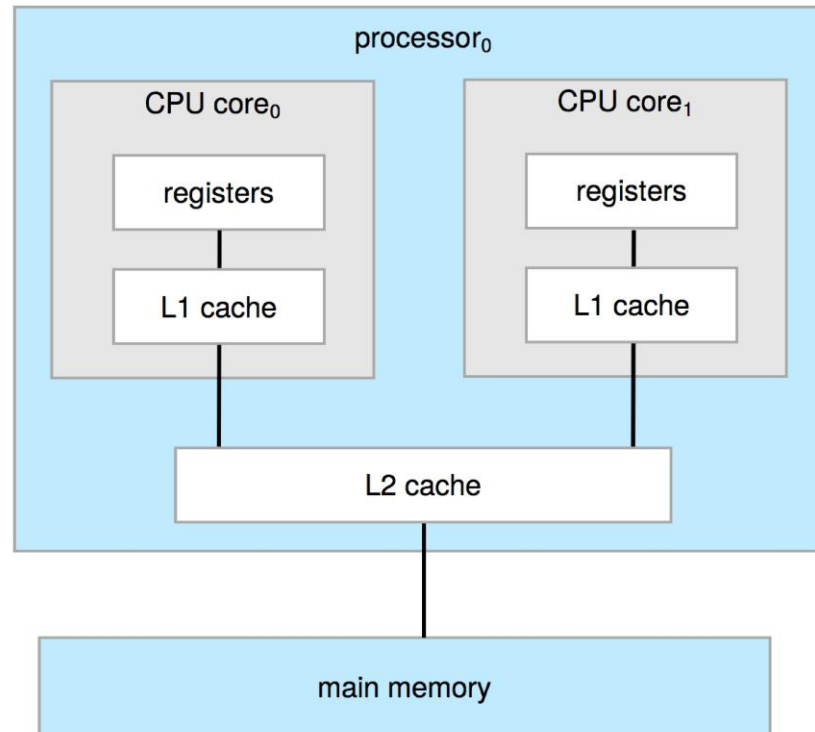

Clustered Systems

- Like multiprocessor systems, but multiple systems working together
 - Usually sharing storage via a **storage-area network (SAN)**
 - Provides a **high-availability** service which survives failures
 - ▶ **Asymmetric clustering** has one machine in hot-standby mode
 - ▶ **Symmetric clustering** has multiple nodes running applications, monitoring each other
 - Some clusters are for **high-performance computing (HPC)**
 - ▶ Applications must be written to use **parallelization**


Clustered Systems

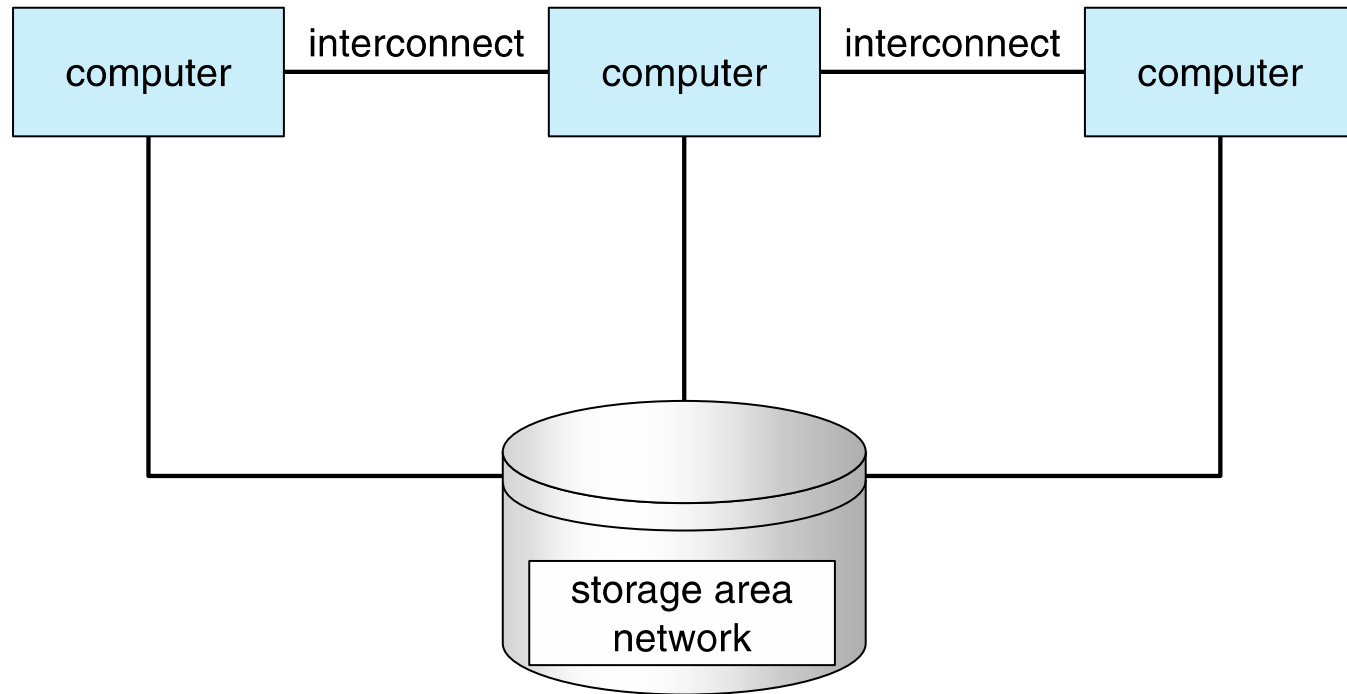

Multiprogramming

- **Multiprogramming (Batch system)** needed for efficiency
 - Single user cannot keep CPU and I/O devices busy at all times
 - Multiprogramming organizes jobs (code and data) so CPU always has one to execute
 - A subset of total jobs in system is kept in memory
 - One job selected and run via **job scheduling**
 - When it has to wait (for I/O for example), OS switches to another job
- **Timesharing (multitasking)** is logical extension in which CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing
 - **Response time** should be small
 - Each user has at least one program executing in memory ⇒ **process**
 - If several jobs ready to run at the same time ⇒ **CPU scheduling**
 - If processes don't fit in memory, **swapping** moves them in and out to run
 - **Virtual memory** allows execution of processes not completely in memory


Memory Layout for Multiprogrammed System

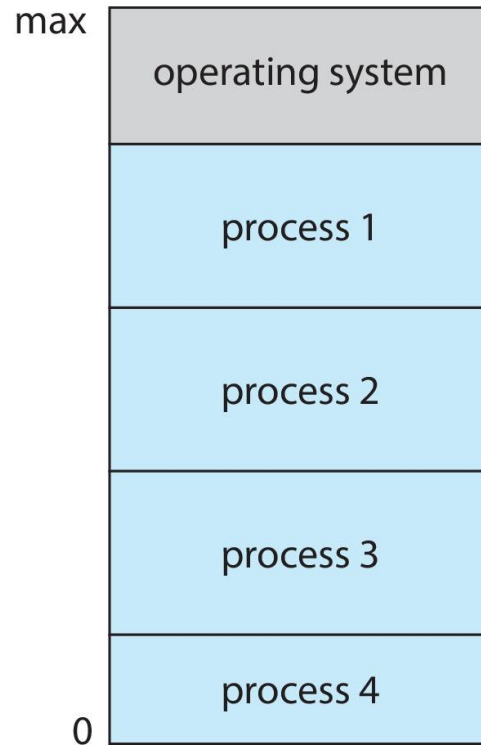

Dual-mode Operation

- **Dual-mode** operation allows OS to protect itself and other system components
 - **User mode** and **kernel mode**
- **Mode bit** provided by hardware
 - Provides ability to distinguish when system is running user code or kernel code.
 - When a user is running \Rightarrow mode bit is “user”
 - When kernel code is executing \Rightarrow mode bit is “kernel”
- How do we guarantee that user does not explicitly set the mode bit to “kernel”?
 - System call changes mode to kernel, return from call resets it to user
- Some instructions designated as **privileged**, only executable in kernel mode

Transition from User to Kernel Mode

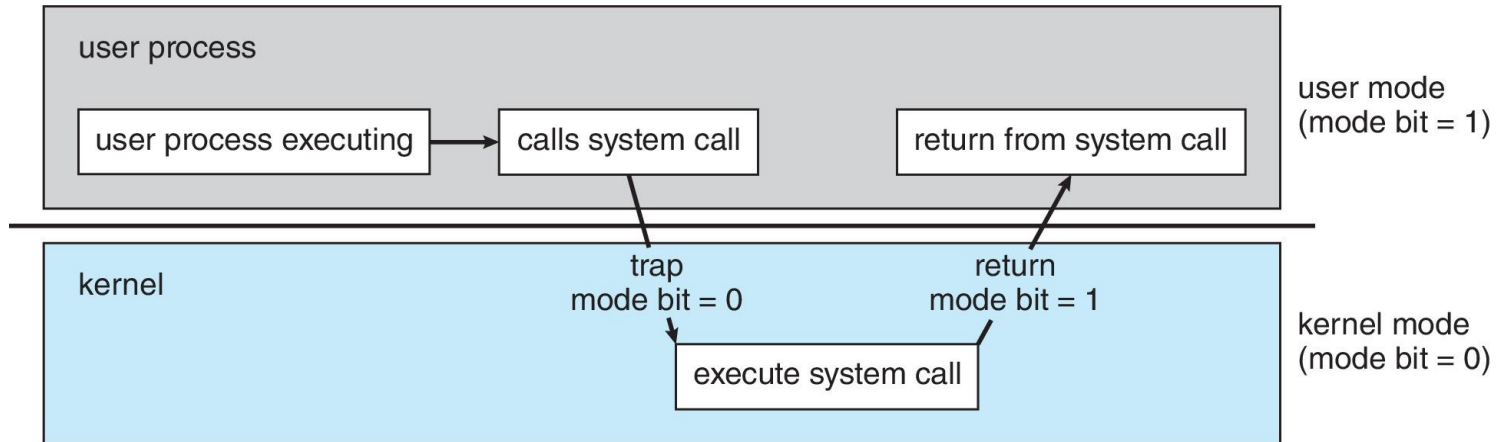

Timer

- Timer to prevent infinite loop (or process hogging resources)
 - Timer is set to interrupt the computer after some time period
 - Keep a counter that is decremented by the physical clock
 - Operating system set the counter (privileged instruction)
 - When counter zero generate an interrupt
 - Set up before scheduling process to regain control or terminate program that exceeds allotted time

Process Management

- A process is a program in execution. It is a unit of work within the system. Program is a ***passive entity***; process is an ***active entity***.
- Process needs resources to accomplish its task
 - CPU, memory, I/O, files
 - Initialization data
- Process termination requires reclaim of any reusable resources
- Single-threaded process has one **program counter** specifying location of next instruction to execute
 - Process executes instructions sequentially, one at a time, until completion
- Multi-threaded process has one program counter per thread
- Typically system has many processes, some user, some operating system running concurrently on one or more CPUs
 - Concurrency by multiplexing the CPUs among the processes / threads

Process Management Activities

The operating system is responsible for the following activities in connection with process management:

- Creating and deleting both user and system processes
- Suspending and resuming processes
- Providing mechanisms for process synchronization
- Providing mechanisms for process communication
- Providing mechanisms for deadlock handling

Memory Management

- To execute a program all (or part) of the instructions must be in memory
- All (or part) of the data that is needed by the program must be in memory.
- Memory management determines what is in memory and when
 - Optimizing CPU utilization and computer response to users
- Memory management activities
 - Keeping track of which parts of memory are currently being used and by whom
 - Deciding which processes (or parts thereof) and data to move into and out of memory
 - Allocating and deallocating memory space as needed

Storage Management

- OS provides uniform, logical view of information storage
 - Abstracts physical properties to logical storage unit - **file**
 - Each medium is controlled by device (i.e., disk drive, tape drive)
 - ▶ Varying properties include access speed, capacity, data-transfer rate, access method (sequential or random)
- File-System management
 - Files usually organized into directories
 - Access control on most systems to determine who can access what
 - OS activities include
 - ▶ Creating and deleting files and directories
 - ▶ Primitives to manipulate files and directories
 - ▶ Mapping files onto secondary storage
 - ▶ Backup files onto stable (non-volatile) storage media

Mass-Storage Management

- Usually disks used to store data that does not fit in main memory or data that must be kept for a “long” period of time
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
 - Mounting and unmounting
 - Free-space management
 - Storage allocation
 - Disk scheduling
 - Partitioning
 - Protection

I/O Subsystem

- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
 - Memory management of I/O including buffering (storing data temporarily while it is being transferred), caching (storing parts of data in faster storage for performance), spooling (the overlapping of output of one job with input of other jobs)
 - General device-driver interface
 - Drivers for specific hardware devices

Protection and Security

- **Protection** – any mechanism for controlling access of processes or users to resources defined by the OS
- **Security** – defense of the system against internal and external attacks
 - Huge range, including denial-of-service, worms, viruses, identity theft, theft of service
- Systems generally first distinguish among users, to determine who can do what
 - User identities (**user IDs**, security IDs) include name and associated number, one per user
 - User ID then associated with all files, processes of that user to determine access control
 - Group identifier (**group ID**) allows set of users to be defined and controls managed, then also associated with each process, file
 - **Privilege escalation** allows user to change to effective ID with more rights

Operating-System Structures

- Chapter 2 of Operating System Concepts
 - Operating System Services
 - User Operating System Interface
 - System Calls
 - Types of System Calls
 - System Programs
 - Operating System Design and Implementation
 - Operating System Structure
 - System Boot

Operating System Services

- Operating systems provide an environment for execution of programs and services to programs and users
- One set of operating-system services provides functions that are helpful to the user:
 - **User interface** - Almost all operating systems have a user interface (**UI**).
 - ▶ Varies between **Command-Line (CLI)**, **Graphics User Interface (GUI)**, **Batch**
 - **Program execution** - The system must be able to load a program into memory and to run that program, end execution, either normally or abnormally (indicating error)
 - **I/O operations** - A running program may require I/O, which may involve a file or an I/O device


Operating System Services (Cont.)

- One set of operating-system services provides functions that are helpful to the user (Cont.):
 - **File-system manipulation** - The file system is of particular interest. Programs need to read and write files and directories, create and delete them, search them, list file information, permission management.
 - **Communications** – Processes may exchange information, on the same computer or between computers over a network
 - ▶ Communications may be via shared memory or through message passing (packets moved by the OS)
 - **Error detection** – OS needs to be constantly aware of possible errors
 - ▶ May occur in the CPU and memory hardware, in I/O devices, in user program
 - ▶ For each type of error, OS should take the appropriate action to ensure correct and consistent computing
 - ▶ Debugging facilities can greatly enhance the user's and programmer's abilities to efficiently use the system

Operating System Services (Cont.)

- Another set of OS functions exists for ensuring the efficient operation of the system itself via resource sharing
 - **Resource allocation** - When multiple users or multiple jobs running concurrently, resources must be allocated to each of them
 - ▶ Many types of resources - CPU cycles, main memory, file storage, I/O devices.
 - **Accounting** - To keep track of which users use how much and what kinds of computer resources
 - **Protection and security** - The owners of information stored in a multiuser or networked computer system may want to control use of that information, concurrent processes should not interfere with each other
 - ▶ **Protection** involves ensuring that all access to system resources is controlled
 - ▶ **Security** of the system from outsiders requires user authentication, extends to defending external I/O devices from invalid access attempts

A View of Operating System Services

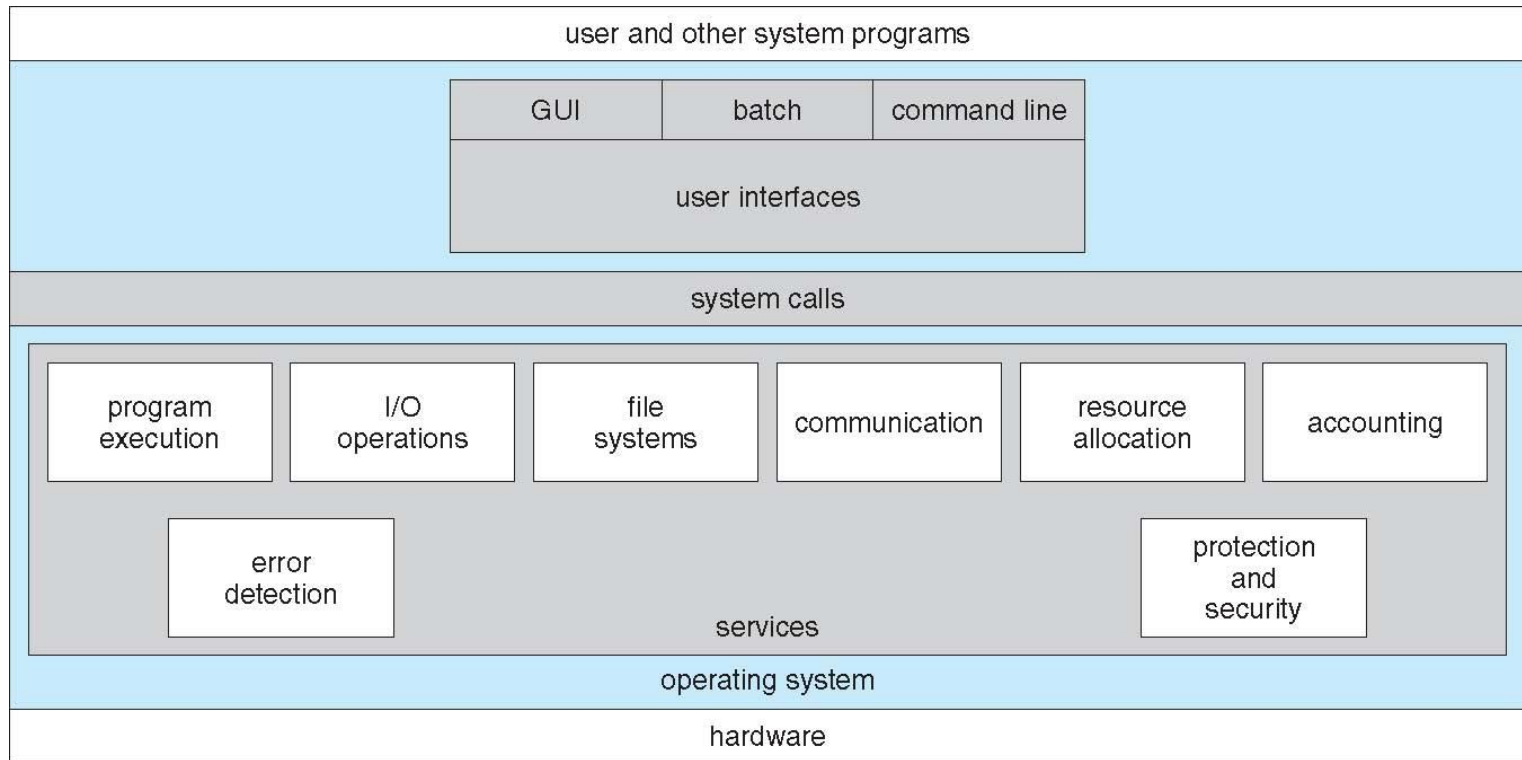

User Operating System Interface - CLI

CLI or **command interpreter** allows direct command entry

- Sometimes implemented in kernel, sometimes by systems program
- Sometimes multiple flavors implemented – **shells**
- Primarily fetches a command from user and executes it
- Sometimes commands built-in, sometimes just names of programs
 - ▶ If the latter, adding new features doesn't require shell modification

Bourne Shell Command Interpreter

```
1. root@r6181-d5-us01:~ (ssh)
root@r6181-d5-u... 1
ssh 2
root@r6181-d5-us01... 3


Last login: Thu Jul 14 08:47:01 on ttys002
iMacPro:~ pbg$ ssh root@r6181-d5-us01
root@r6181-d5-us01's password:
Last login: Thu Jul 14 06:01:11 2016 from 172.16.16.162
[root@r6181-d5-us01 ~]# uptime
 06:57:48 up 16 days, 10:52,  3 users,  load average: 129.52, 80.33, 56.55
[root@r6181-d5-us01 ~]# df -kh
Filesystem                Size      Used Avail Use% Mounted on
/dev/mapper/vg_ks-lv_root
                          50G       19G   28G   41% /
tmpfs                      127G      520K   127G    1% /dev/shm
/dev/sda1                   477M      71M   381M   16% /boot
/dev/dssd0000               1.0T     480G   545G   47% /dssd_xfs
tcp://192.168.150.1:3334/orangefs
                          12T      5.7T   6.4T   47% /mnt/orangefs
/dev/gpfs-test              23T      1.1T   22T    5% /mnt/gpfs
[root@r6181-d5-us01 ~]#
[root@r6181-d5-us01 ~]# ps aux | sort -nrk 3,3 | head -n 5
root      97653 11.2  6.6 42665344 17520636 ?        S<Ll    Jul13 166:23 /usr/lpp/mmfs/bin/mmfstd
root      69849  6.6  0.0      0      0 ?        S       Jul12 181:54 [vpthread-1-1]
root      69850  6.4  0.0      0      0 ?        S       Jul12 177:42 [vpthread-1-2]
root      3829  3.0  0.0      0      0 ?        S       Jun27 730:04 [rp_thread 7:0]
root      3826  3.0  0.0      0      0 ?        S       Jun27 728:08 [rp_thread 6:0]
[root@r6181-d5-us01 ~]# ls -l /usr/lpp/mmfs/bin/mmfstd
-r-x----- 1 root root 20667161 Jun  3  2015 /usr/lpp/mmfs/bin/mmfstd
[root@r6181-d5-us01 ~]#
```

User Operating System Interface - GUI


- User-friendly **desktop** metaphor interface
 - Usually mouse, keyboard, and monitor
 - **Icons** represent files, programs, actions, etc
 - Various mouse buttons over objects in the interface cause various actions (provide information, options, execute function, open directory (known as a **folder**))
 - Invented at Xerox PARC
- Many systems now include both CLI and GUI interfaces
 - Microsoft Windows is GUI with CLI “command” shell
 - Apple Mac OS X is “Aqua” GUI interface with UNIX kernel underneath and shells available
 - Unix and Linux have CLI with optional GUI interfaces (CDE, KDE, GNOME)

Touchscreen Interfaces

- Touchscreen devices require new interfaces
 - Mouse not possible or not desired
 - Actions and selection based on gestures
 - Virtual keyboard for text entry
- Voice commands

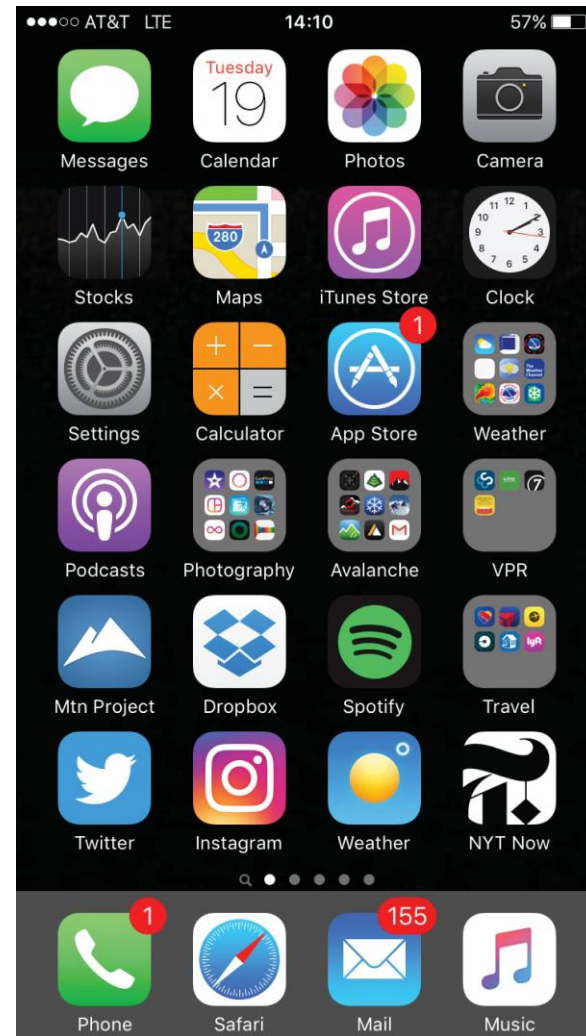

The Mac OS X GUI

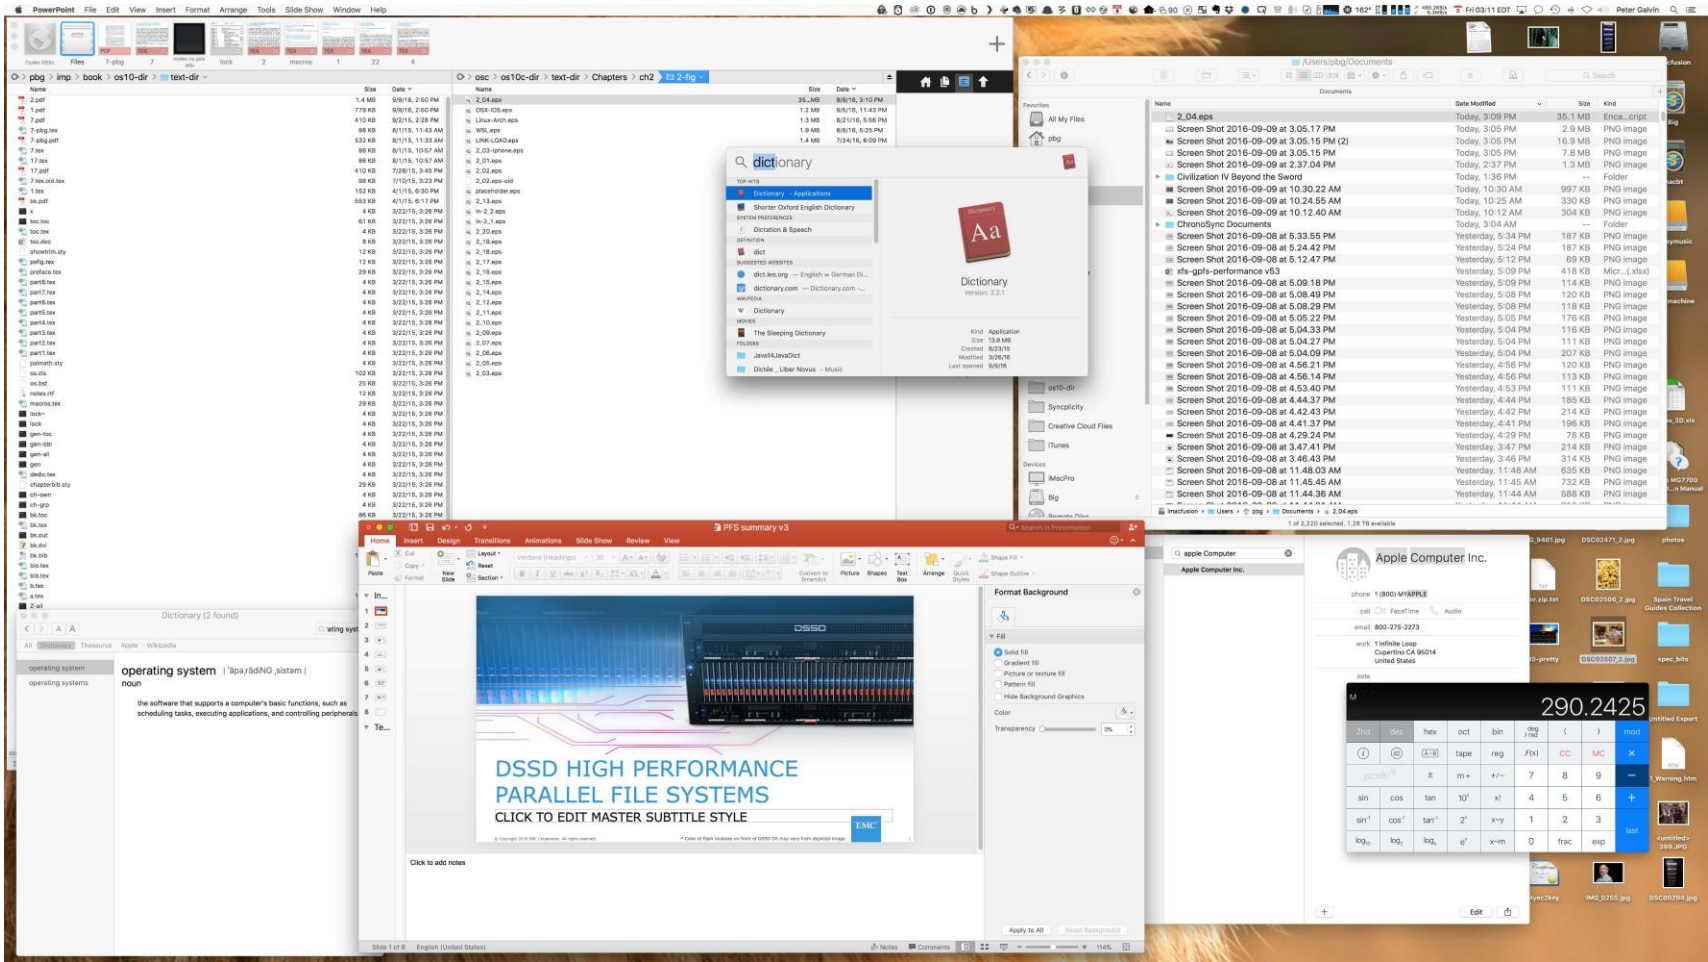


System Calls

- Programming interface to the services provided by the OS
- Typically written in a high-level language (C or C++)
- Mostly accessed by programs via a high-level **Application Programming Interface (API)** rather than direct system call use
- Three most common APIs are
 - Win32 API for Windows,
 - POSIX API for POSIX-based systems (including virtually all versions of UNIX, Linux, and Mac OS X),
 - and Java API for the Java virtual machine (JVM)

Example of System Calls

- System call sequence to copy the contents of one file to another file

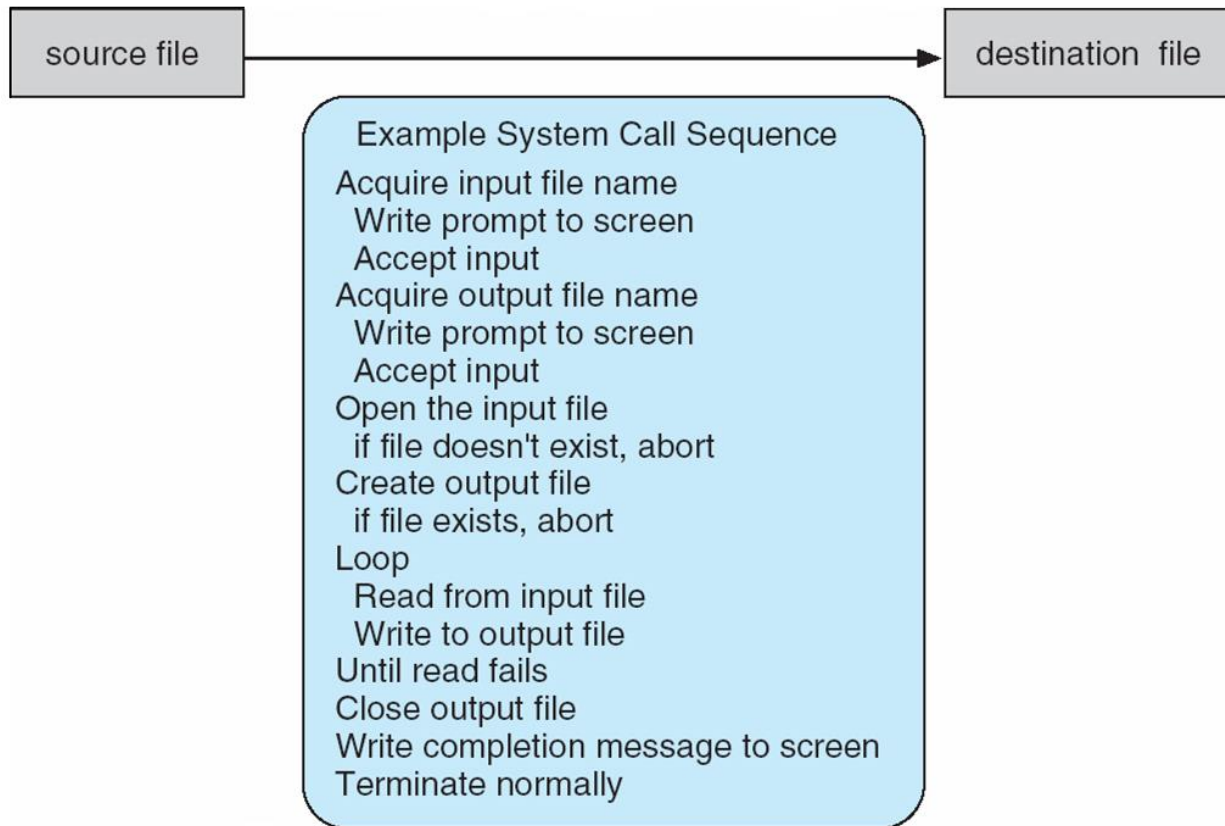

Example of Standard API

EXAMPLE OF STANDARD API

As an example of a standard API, consider the `read()` function that is available in UNIX and Linux systems. The API for this function is obtained from the `man` page by invoking the command

```
man read
```

on the command line. A description of this API appears below:

```
#include <unistd.h>

ssize_t  read(int fd, void *buf, size_t count)
```

return value	function name	parameters
--------------	---------------	------------

A program that uses the `read()` function must include the `unistd.h` header file, as this file defines the `ssize_t` and `size_t` data types (among other things). The parameters passed to `read()` are as follows:


- `int fd`—the file descriptor to be read
- `void *buf`—a buffer where the data will be read into
- `size_t count`—the maximum number of bytes to be read into the buffer

On a successful read, the number of bytes read is returned. A return value of 0 indicates end of file. If an error occurs, `read()` returns `-1`.

System Call Implementation

- Typically, a number associated with each system call
 - **System-call interface** maintains a table indexed according to these numbers
- The system call interface invokes the intended system call in OS kernel and returns status of the system call and any return values
- The caller need know nothing about how the system call is implemented
 - Just needs to obey API and understand what OS will do as a result call
 - Most details of OS interface hidden from programmer by API
 - ▶ Managed by run-time support library (set of functions built into libraries included with compiler)


API – System Call – OS Relationship

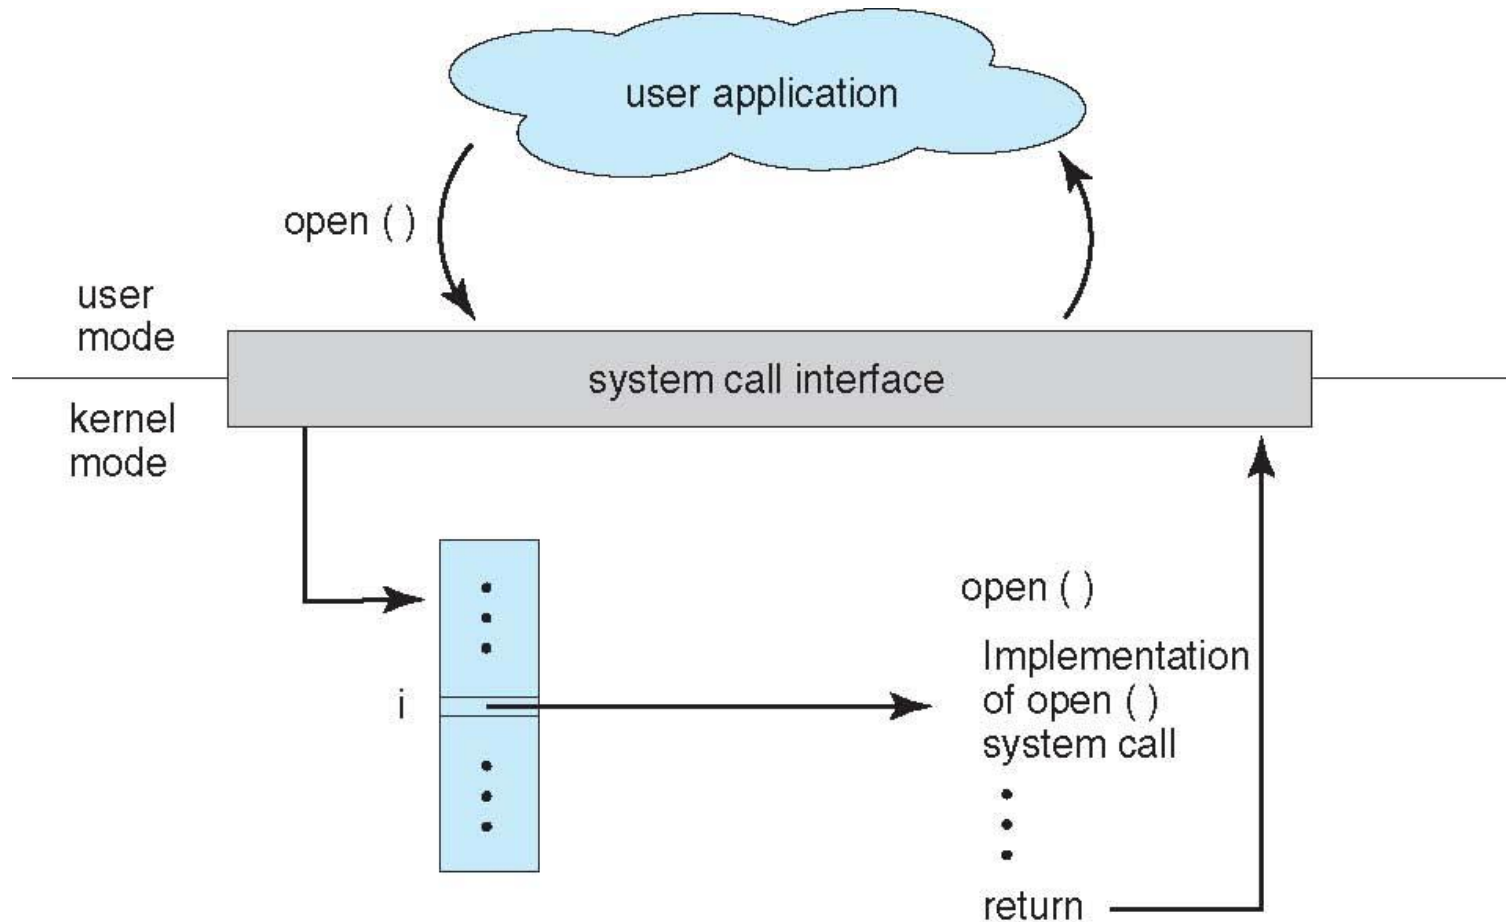

System Call Parameter Passing

- Often, more information is required than simply identity of desired system call
 - Exact type and amount of information vary according to OS and call
- Three general methods used to pass parameters to the OS
 - Simplest: pass the parameters in registers
 - ▶ In some cases, may be more parameters than registers
 - Parameters stored in a block, or table, in memory, and address of block passed as a parameter in a register
 - ▶ This approach taken by Linux and Solaris
 - Parameters placed, or **pushed**, onto the **stack** by the program and **popped** off the stack by the operating system
 - Block and stack methods do not limit the number or length of parameters being passed

Parameter Passing via Table

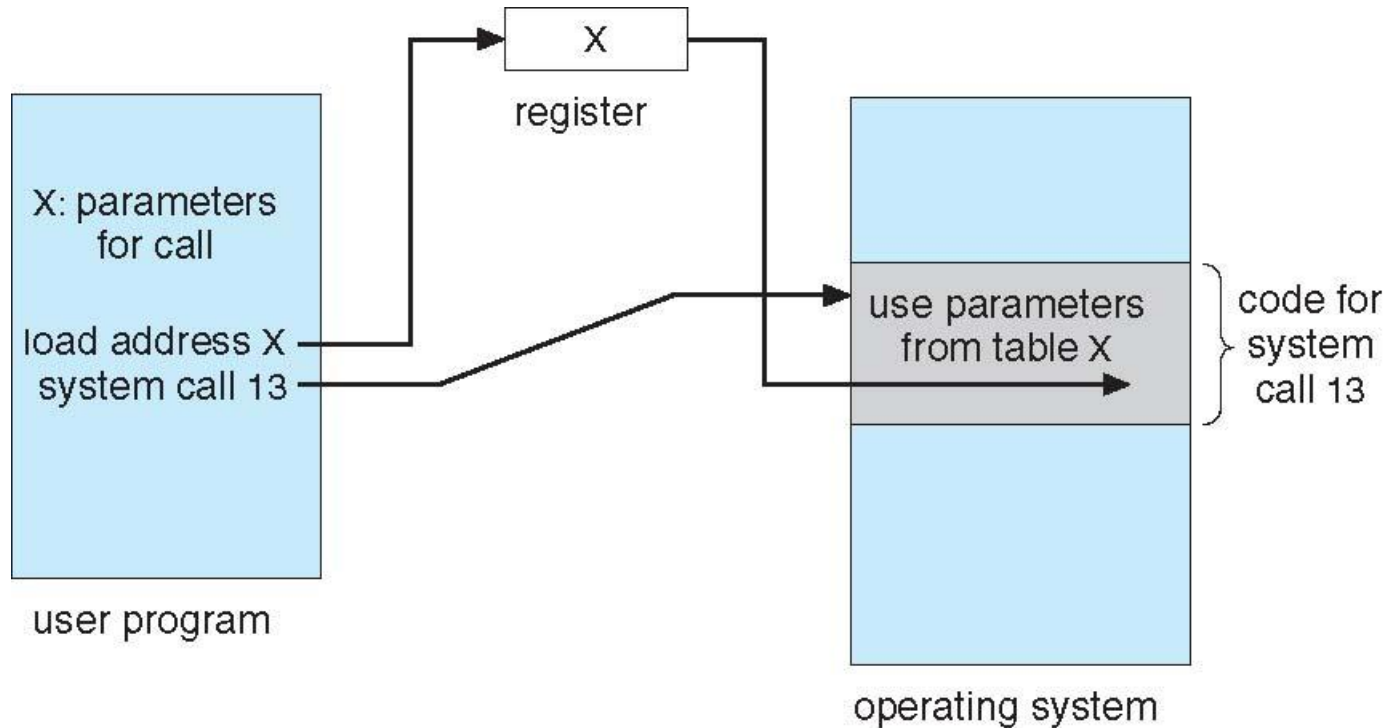

Types of System Calls

- Process control
 - create process, terminate process
 - end, abort
 - load, execute
 - get process attributes, set process attributes
 - wait for time
 - wait event, signal event
 - allocate and free memory
 - Dump memory if error
 - **Debugger** for determining **bugs**, **single step** execution
 - **Locks** for managing access to shared data between processes

Types of System Calls

- File management
 - create file, delete file
 - open, close file
 - read, write, reposition
 - get and set file attributes
- Device management
 - request device, release device
 - read, write, reposition
 - get device attributes, set device attributes
 - logically attach or detach devices

Types of System Calls (Cont.)

- Information maintenance
 - get time or date, set time or date
 - get system data, set system data
 - get and set process, file, or device attributes
- Communications
 - create, delete communication connection
 - send, receive messages if **message passing model** to **host name** or **process name**
 - ▶ From **client** to **server**
 - **Shared-memory model** create and gain access to memory regions
 - transfer status information
 - attach and detach remote devices

Types of System Calls (Cont.)


- Protection
 - Control access to resources
 - Get and set permissions
 - Allow and deny user access

Examples of Windows and Unix System Calls

	Windows	Unix
Process Control	CreateProcess() ExitProcess() WaitForSingleObject()	fork() exit() wait()
File Manipulation	CreateFile() ReadFile() WriteFile() CloseHandle()	open() read() write() close()
Device Manipulation	SetConsoleMode() ReadConsole() WriteConsole()	ioctl() read() write()
Information Maintenance	GetCurrentProcessID() SetTimer() Sleep()	getpid() alarm() sleep()
Communication	CreatePipe() CreateFileMapping() MapViewOfFile()	pipe() shmget() mmap()
Protection	SetFileSecurity() InitializeSecurityDescriptor() SetSecurityDescriptorGroup()	chmod() umask() chown()


Standard C Library Example

- C program invoking printf() library call, which calls write() system call

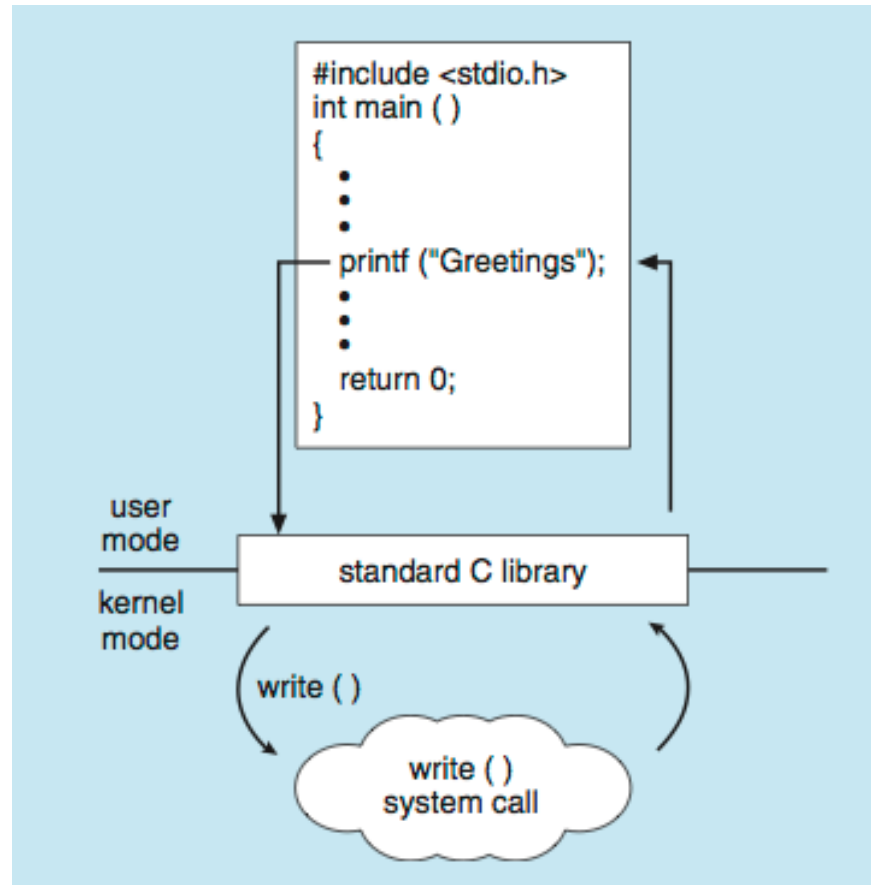


Example: MS-DOS

- Single-tasking
- Shell invoked when system booted
- Simple method to run program
 - No process created
- Single memory space
- Loads program into memory, overwriting all but the kernel
- Program exit -> shell reloaded

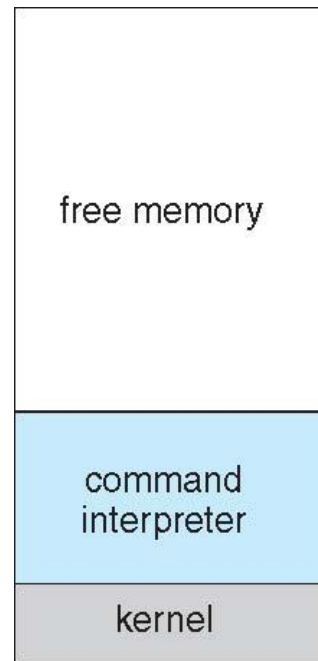

(a)

At system startup

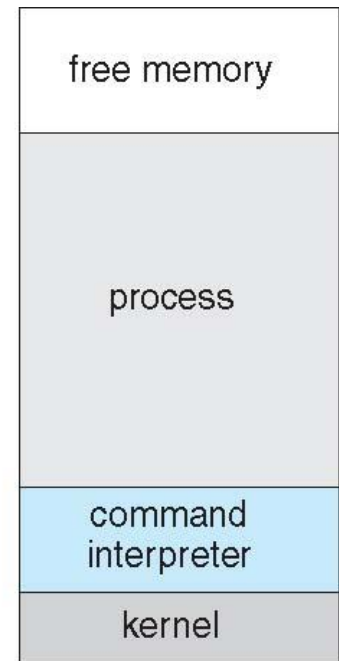


(b)

running a program

Example: FreeBSD

- Unix variant
- Multitasking
- User login -> invoke user's choice of shell
- Shell executes `fork()` system call to create process
 - Executes `exec()` to load program into process
 - Shell waits for process to terminate or continues with user commands
- Process exits with:
 - `code = 0` – no error
 - `code > 0` – error code

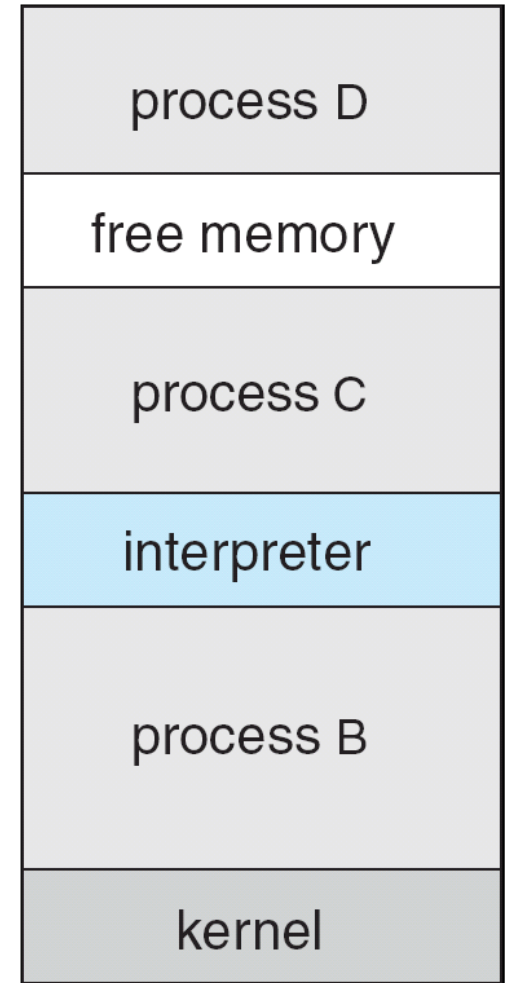

System Programs

- System programs provide a convenient environment for program development and execution. They can be divided into:
 - File manipulation
 - Status information
 - Programming language support
 - Program loading and execution
 - Communications
 - Background services
 - Application programs
- Most users' view of the operation system is defined by system programs, not the actual system calls

System Programs

- Provide a convenient environment for program development and execution
 - Some of them are simply user interfaces to system calls; others are considerably more complex
- **File management** - Create, delete, copy, rename, print, dump, list, and generally manipulate files and directories
- **Status information**
 - Some ask the system for info - date, time, amount of available memory, disk space, number of users
 - Others provide detailed performance, logging, and debugging information
 - Typically, these programs format and print the output to the terminal or other output devices

System Programs (Cont.)

- **File modification**
 - Text editors to create and modify files
 - Special commands to search contents of files or perform transformations of the text
- **Programming-language support** - Compilers, assemblers, debuggers and interpreters sometimes provided
- **Program loading and execution**- Absolute loaders, relocatable loaders, linkage editors, and overlay-loaders, debugging systems for higher-level and machine language
- **Communications** - Provide the mechanism for creating virtual connections among processes, users, and computer systems
 - Allow users to send messages to one another's screens, browse web pages, send electronic-mail messages, log in remotely, transfer files from one machine to another


System Programs (Cont.)

- **Background Services**
 - Launch at boot time
 - ▶ Some for system startup, then terminate
 - ▶ Some from system boot to shutdown
 - Provide facilities like disk checking, process scheduling, error logging, printing
 - Run in user context not kernel context
 - Known as **services**, **subsystems**, **daemons**
- **Application programs**
 - Don't pertain to system
 - Run by users
 - Not typically considered part of OS
 - Launched by command line, mouse click, finger poke

Linkers and Loaders

- Source code compiled into object files designed to be loaded into any physical memory location – **relocatable object file**
- **Linker** combines these into single binary **executable** file
 - Also brings in libraries
- Program resides on secondary storage as binary executable
- Must be brought into memory by **loader** to be executed
 - **Relocation** assigns final addresses to program parts and adjusts code and data in program to match those addresses
- Modern general purpose systems don't link libraries into executables
 - Rather, **dynamically linked libraries** (in Windows, **DLLs**) are loaded as needed, shared by all that use the same version of that same library (loaded once)
- Object, executable files have standard formats, so operating system knows how to load and start them

The Role of the Linker and Loader

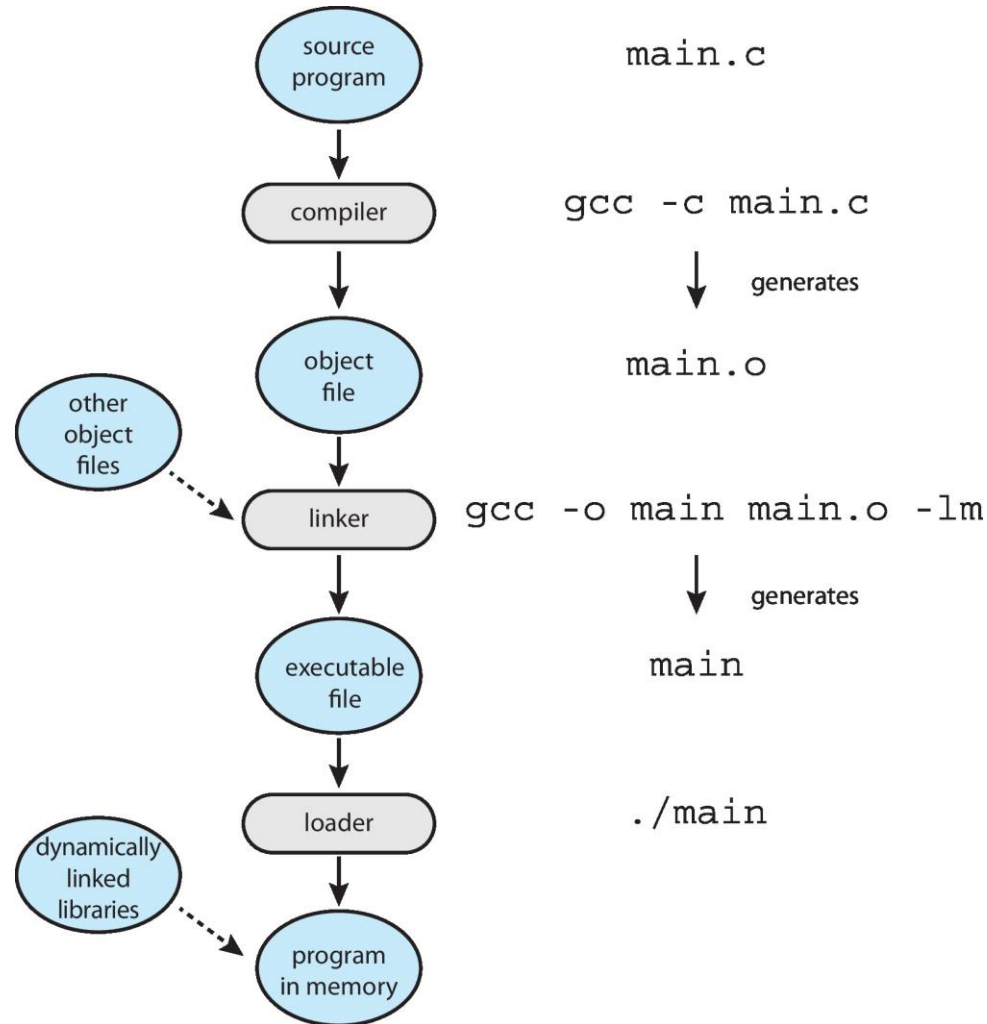

Why Applications are Operating System Specific

- Apps compiled on one system usually not executable on other operating systems
- Each operating system provides its own unique system calls
 - Own file formats, etc.
- Apps can be multi-operating system
 - Written in interpreted language like Python, Ruby, and interpreter available on multiple operating systems
 - App written in language that includes a VM containing the running app (like Java)
 - Use standard language (like C), compile separately on each operating system to run on each
- **Application Binary Interface (ABI)** is architecture equivalent of API, defines how different components of binary code can interface for a given operating system on a given architecture, CPU, etc.

Implementation

- Much variation
 - Early OSES in assembly language
 - Now C, C++
- Actually usually a mix of languages
 - Lowest levels in assembly
 - Main body in C
 - Systems programs in C, C++, scripting languages like PERL, Python, shell scripts
- More high-level language easier to **port** to other hardware
 - But slower
- **Emulation** can allow an OS to run on non-native hardware

Operating System Structure


- General-purpose OS is very large program
- Various ways to structure ones
 - Monolithic - UNIX
 - Layered - an abstraction
 - Microkernel - Mach

Monolithic Structure – Original UNIX

- UNIX – limited by hardware functionality, the original UNIX operating system had limited structuring.
- The UNIX OS consists of two separable parts
 - Systems programs
 - The kernel
 - ▶ Consists of everything below the system-call interface and above the physical hardware
 - ▶ Provides the file system, CPU scheduling, memory management, and other operating-system functions; a large number of functions for one level


Traditional UNIX System Structure

Beyond simple but not fully layered

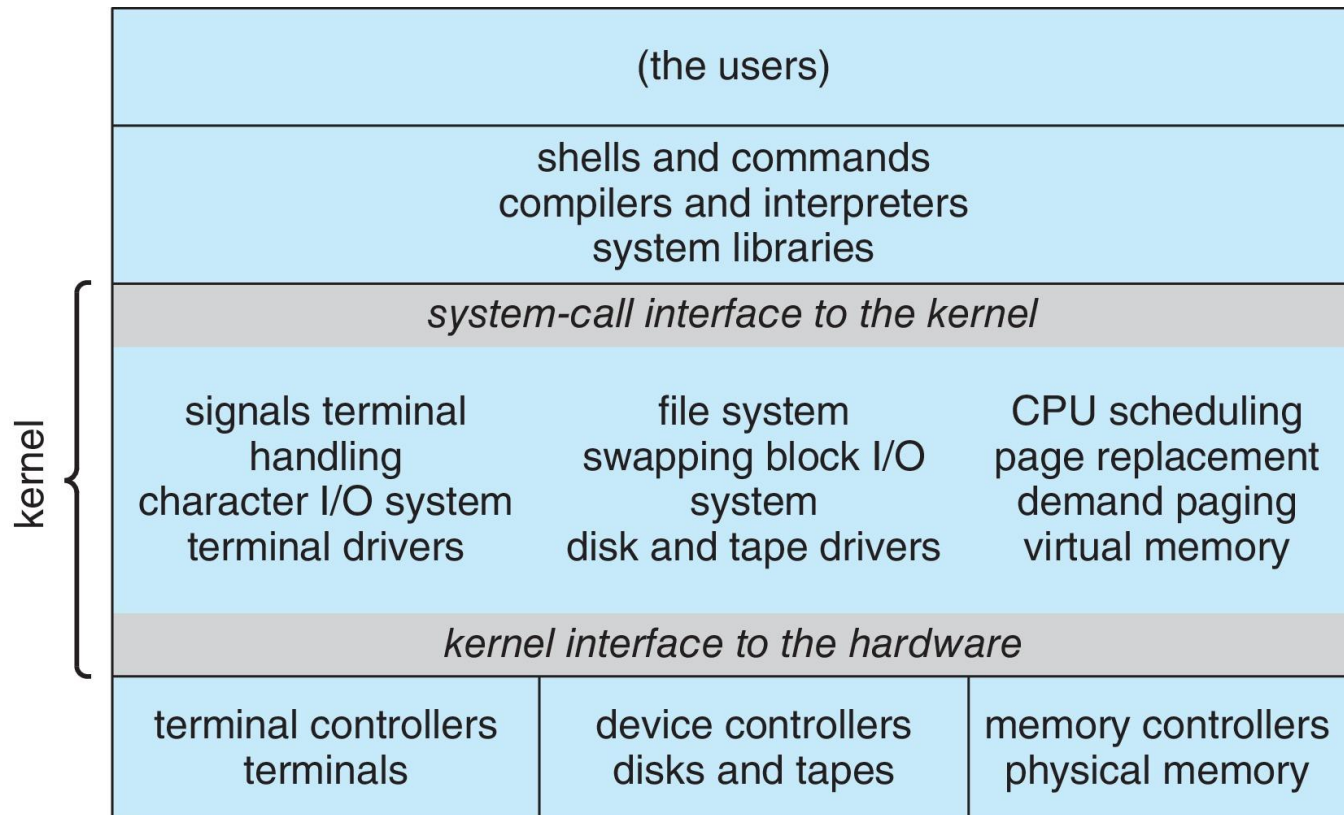


Linux System Structure

Monolithic plus modular design

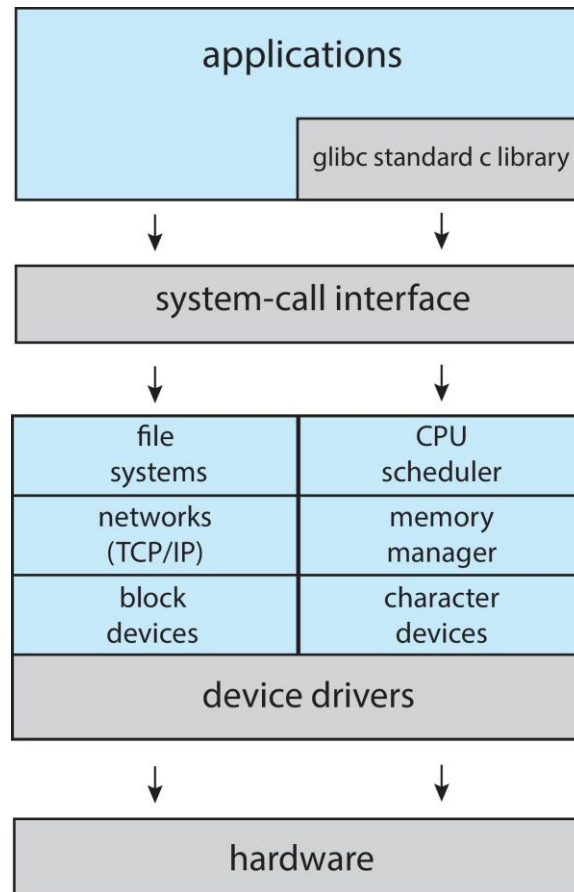

Layered Approach


- The operating system is divided into a number of layers (levels), each built on top of lower layers. The bottom layer (layer 0), is the hardware; the highest (layer N) is the user interface.
- With modularity, layers are selected such that each uses functions (operations) and services of only lower-level layers

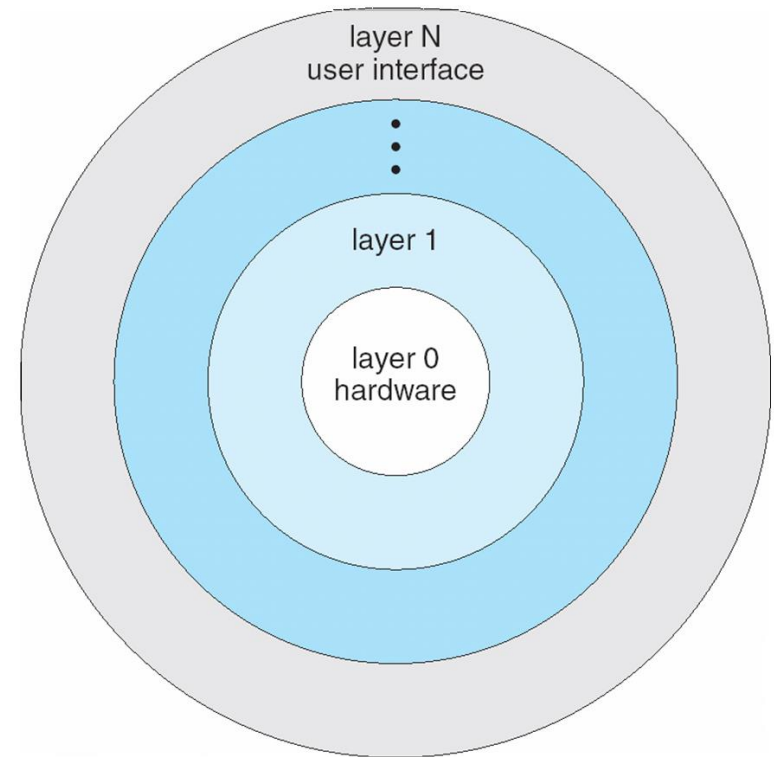

Microkernel System Structure

- Moves as much from the kernel into user space
- **Mach** example of **microkernel**
 - Mac OS X kernel (**Darwin**) partly based on Mach
- Communication takes place between user modules using **message passing**
- Benefits:
 - Easier to extend a microkernel
 - Easier to port the operating system to new architectures
 - More reliable (less code is running in kernel mode)
 - More secure
- Detriments:
 - Performance overhead of user space to kernel space communication


Microkernel System Structure

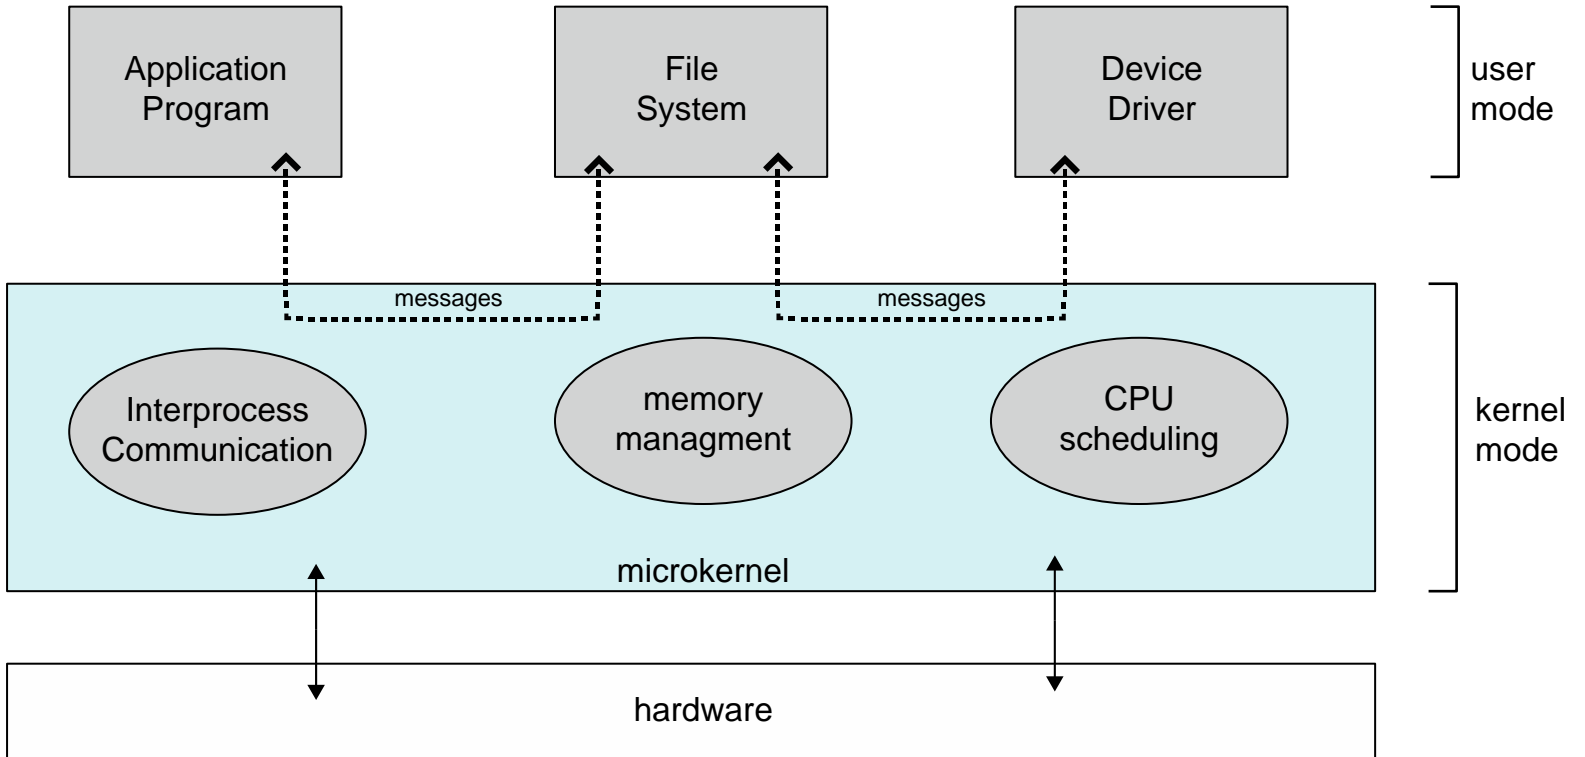

Modules

- Many modern operating systems implement **loadable kernel modules (LKMs)**
 - Uses object-oriented approach
 - Each core component is separate
 - Each talks to the others over known interfaces
 - Each is loadable as needed within the kernel
- Overall, similar to layers but with more flexible
 - Linux, Solaris, etc.


Solaris Modular Approach

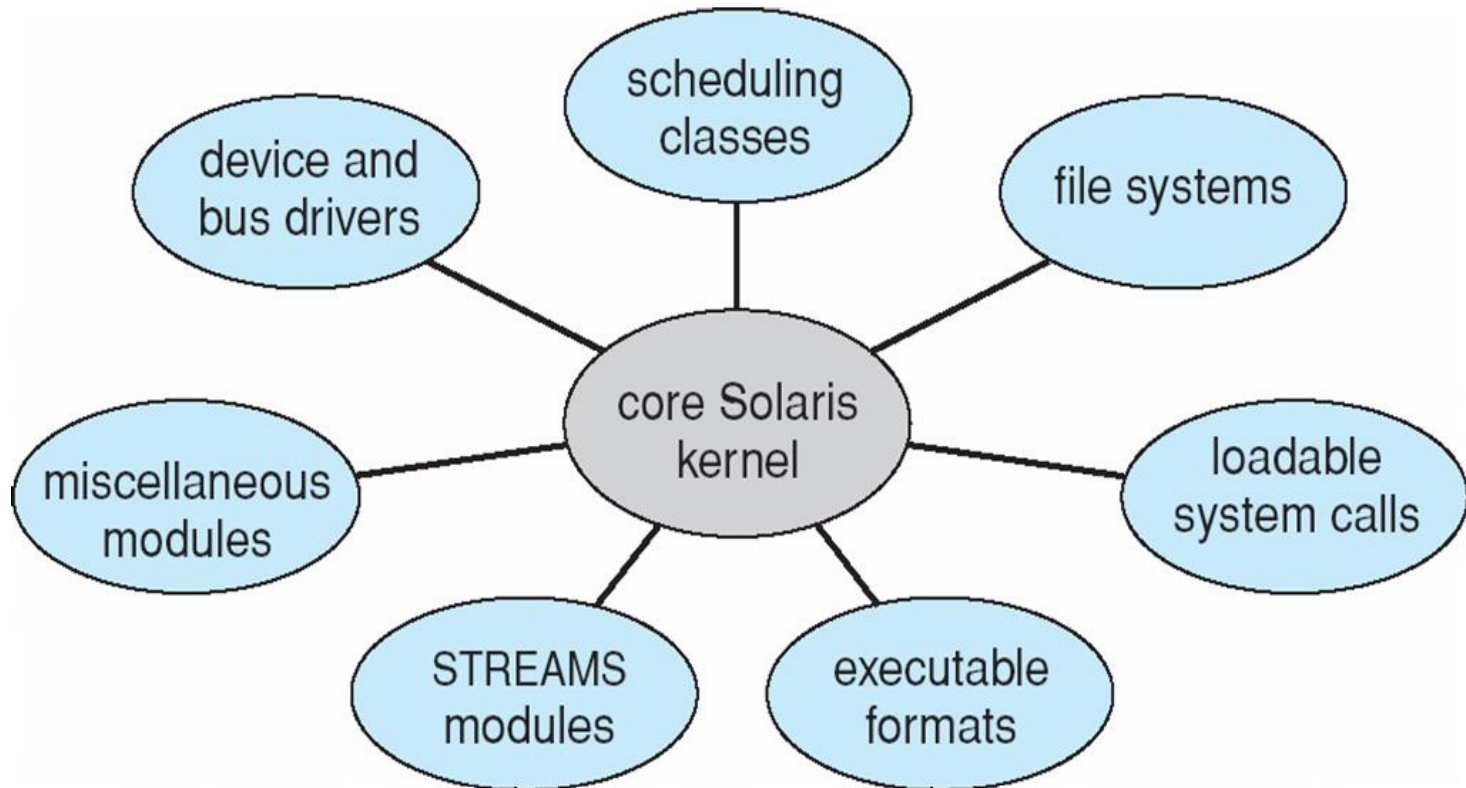

Hybrid Systems

- Most modern operating systems are not one pure model
 - Hybrid combines multiple approaches to address performance, security, usability needs
 - Linux and Solaris kernels in kernel address space, so monolithic, plus modular for dynamic loading of functionality
 - Windows mostly monolithic, plus microkernel
- Apple Mac OS X hybrid, layered, **Aqua** UI plus **Cocoa** programming environment
 - Below is kernel consisting of Mach microkernel and BSD Unix parts, plus I/O kit and dynamically loadable modules (called **kernel extensions**)

Darwin

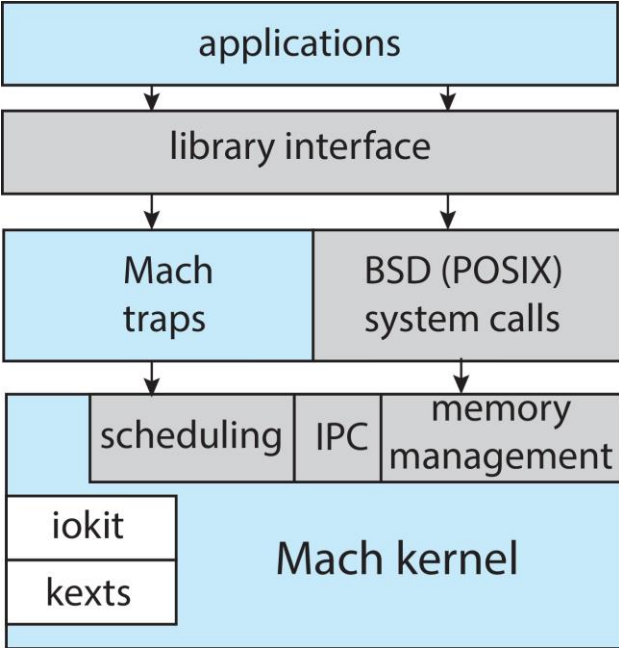

iOS

- Apple mobile OS for *iPhone*, *iPad*
 - Structured on Mac OS X, added functionality
 - Does not run OS X applications natively
 - ▶ Also runs on different CPU architecture (ARM vs. Intel)
 - **Cocoa Touch** Objective-C API for developing apps
 - **Media services** layer for graphics, audio, video
 - **Core services** provides cloud computing, databases
 - Core operating system, based on Mac OS X kernel

Cocoa Touch

Media Services


Core Services

Core OS

Android

- Developed by Open Handset Alliance (mostly Google)
 - Open Source
- Similar stack to IOS
- Based on Linux kernel but modified
 - Provides process, memory, device-driver management
 - Adds power management
- Runtime environment includes core set of libraries and Dalvik virtual machine
 - Apps developed in Java plus Android API
 - ▶ Java class files compiled to Java bytecode then translated to executable than runs in Dalvik VM
- Libraries include frameworks for web browser (webkit), database (SQLite), multimedia, smaller libc

Android Architecture

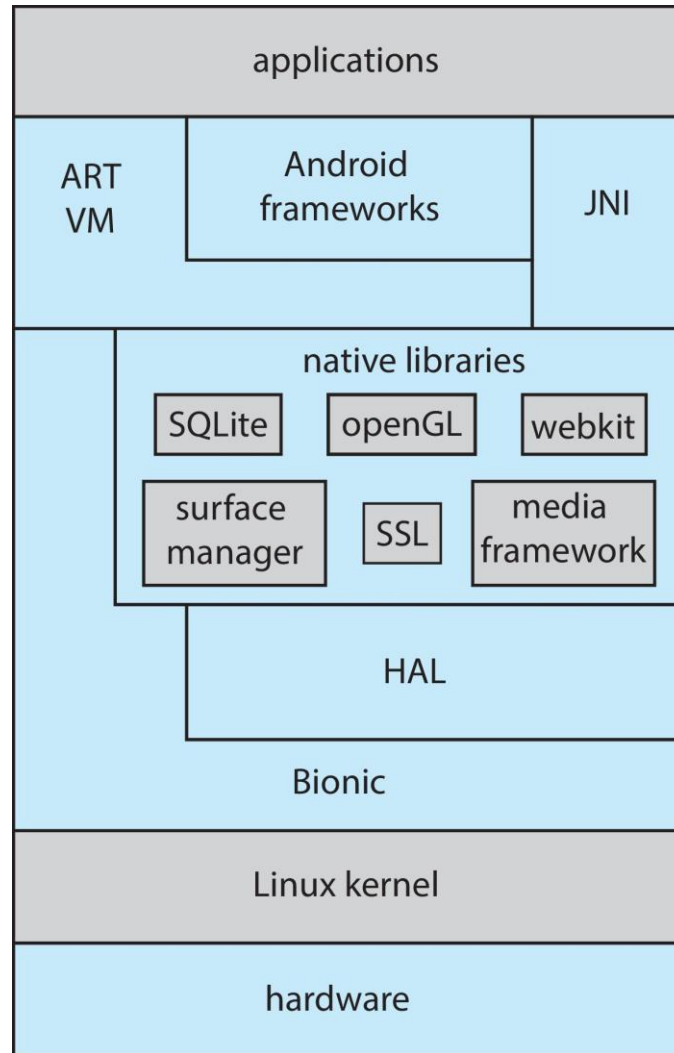


System Boot

- When power initialized on system, execution starts at a fixed memory location
- Operating system must be made available to hardware so hardware can start it
 - Small piece of code – **bootstrap loader**, **BIOS**, stored in **ROM** or **EEPROM** locates the kernel, loads it into memory, and starts it
 - Sometimes two-step process where **boot block** at fixed location loaded by ROM code, which loads bootstrap loader from disk
 - Modern systems replace BIOS with **Unified Extensible Firmware Interface (UEFI)**
- Common bootstrap loader, **GRUB**, allows selection of kernel from multiple disks, versions, kernel options
- Kernel loads and system is then **running**
- Boot loaders frequently allow various boot states, such as single user mode


Disk Organization

- Il disco può essere suddiviso in partizioni ognuna contenente un proprio file system
- Il partizionamento del disco avviene mediante la formattazione di alto livello

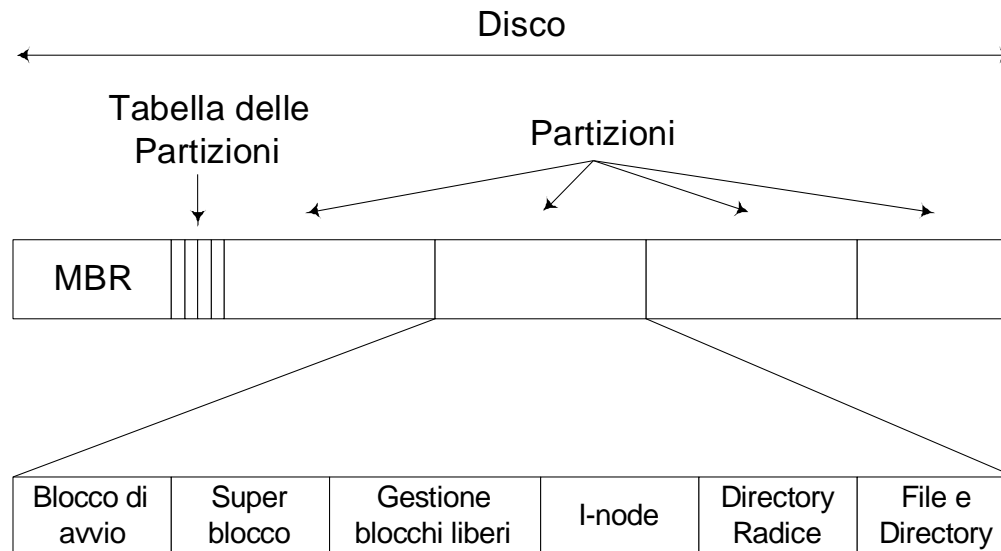

Disk Organization

- MBR (Master Boot Record)
 - Contiene programma di avvio
 - La fine del MBR contiene la tabella delle partizioni
- Tabella delle partizioni
 - Contiene punto di inizio e fine di ogni partizione
 - Una sola partizione è marcata come attiva
 - E' la partizione da cui verrà caricato il SO

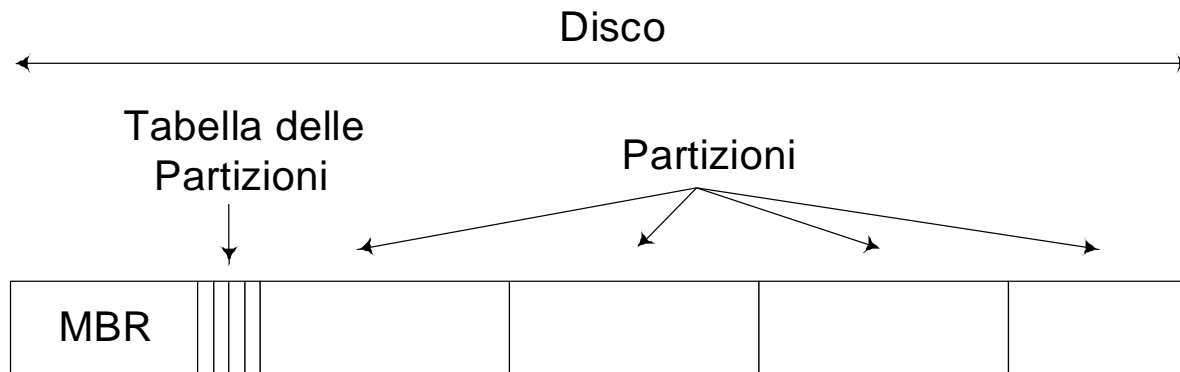

Disk Organization

- Blocco di avvio
 - Contiene semplice codice eseguito in fase di bootstrap e serve a caricare il kernel
 - Ogni partizione contiene il Blocco di Avvio anche se non contiene il SO (potrebbe contenerne uno)
- Superblocco
 - Contiene informazioni sul file system
 - Numero magico che identifica il FS
 - Numero di blocchi del FS
 - ...
- Gestione per lo spazio libero
 - Strutture dati per la gestione dei blocchi liberi
- I-node
 - Nei SO che utilizzano gli i-node questi sono raggruppati in una parte del disco
- Directory radice
- File e directory

Two-Step Bootstrap

- Esecuzione del programma di avvio in ROM
 - Caricamento del MBR
- Esecuzione del codice di avvio contenuto nel MBR
 - Localizza la partizione attiva dalla tabella delle partizioni
 - Legge il primo blocco (blocco di avvio) e lo esegue
- Esecuzione del codice nel Blocco di Avvio
 - Localizza il kernel nella partizione attiva
 - Carica in memoria il kernel
 - Cede il controllo al kernel